


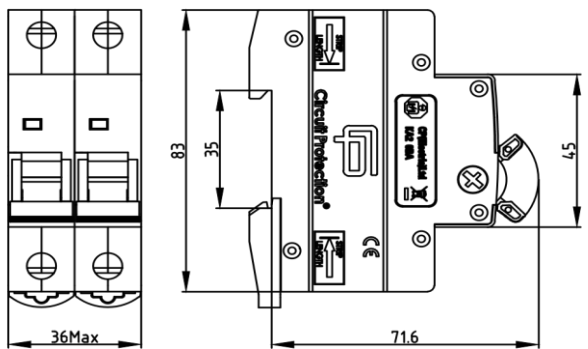






		BARCODE  5 060523 520121																											
		MAIN SWITCH IT1002 																											
TECHNICAL		CONNECTIONS																											
<table border="1"> <tr> <th>Type</th> <td>MAIN SWITCH</td> </tr> <tr> <th>Standards</th> <td>BS EN 60947-3</td> </tr> <tr> <th>Pole</th> <td>2, 3, 4</td> </tr> <tr> <th>Rated Breaking Capacity (Icu)</th> <td>6kA</td> </tr> <tr> <th>Rated Current</th> <td>100A, 125A</td> </tr> <tr> <th>Rated Voltage (Un/AC)</th> <td>230V/400V</td> </tr> <tr> <th>Frequency (Hz)</th> <td>50/60Hz</td> </tr> <tr> <th>Mechanical Endurance</th> <td>20,000</td> </tr> <tr> <th>Protection Degree</th> <td>IP20</td> </tr> <tr> <th>Operating Temperature °C</th> <td>-25~ +40°C</td> </tr> <tr> <th>Storage Temperature °C</th> <td>-25~ +70°C</td> </tr> <tr> <th>Terminal Size (mm²)</th> <td>16 - 50</td> </tr> <tr> <th>Tightening Torque (Nm)</th> <td>2.5</td> </tr> </table>	Type	MAIN SWITCH	Standards	BS EN 60947-3	Pole	2, 3, 4	Rated Breaking Capacity (Icu)	6kA	Rated Current	100A, 125A	Rated Voltage (Un/AC)	230V/400V	Frequency (Hz)	50/60Hz	Mechanical Endurance	20,000	Protection Degree	IP20	Operating Temperature °C	-25~ +40°C	Storage Temperature °C	-25~ +70°C	Terminal Size (mm ²)	16 - 50	Tightening Torque (Nm)	2.5	2P Isolator 		
Type	MAIN SWITCH																												
Standards	BS EN 60947-3																												
Pole	2, 3, 4																												
Rated Breaking Capacity (Icu)	6kA																												
Rated Current	100A, 125A																												
Rated Voltage (Un/AC)	230V/400V																												
Frequency (Hz)	50/60Hz																												
Mechanical Endurance	20,000																												
Protection Degree	IP20																												
Operating Temperature °C	-25~ +40°C																												
Storage Temperature °C	-25~ +70°C																												
Terminal Size (mm ²)	16 - 50																												
Tightening Torque (Nm)	2.5																												
		DIMENSIONS 																											
PRODUCT DATA																													
<table border="1"> <tr> <td>PART NUMBER</td> <td>IT1002</td> </tr> <tr> <td>BARCODE</td> <td>5060523520121</td> </tr> <tr> <td>DESCRIPTION</td> <td>100A AC22A 2POLE MAIN SWITCH</td> </tr> <tr> <td>VOLTAGE</td> <td>230V/50Hz</td> </tr> <tr> <td>MAXIMUM LOAD</td> <td>100A AC22A</td> </tr> <tr> <td>TERMINAL CAPACITY</td> <td>50mm²</td> </tr> <tr> <td>STANDARD</td> <td>BS EN 60947-3</td> </tr> <tr> <td>IP RATING</td> <td>20</td> </tr> <tr> <td>MATERIAL</td> <td>PA6 (Nylon 6)</td> </tr> <tr> <td>WEIGHT (1PC) Kg</td> <td>0.19</td> </tr> <tr> <td>INNER CARTON QUANTITY</td> <td>6</td> </tr> <tr> <td>OUTER CARTON QUANTITY</td> <td>120</td> </tr> <tr> <td>ORIGIN OF MANUFACTURE</td> <td>CHINA</td> </tr> </table>	PART NUMBER	IT1002	BARCODE	5060523520121	DESCRIPTION	100A AC22A 2POLE MAIN SWITCH	VOLTAGE	230V/50Hz	MAXIMUM LOAD	100A AC22A	TERMINAL CAPACITY	50mm ²	STANDARD	BS EN 60947-3	IP RATING	20	MATERIAL	PA6 (Nylon 6)	WEIGHT (1PC) Kg	0.19	INNER CARTON QUANTITY	6	OUTER CARTON QUANTITY	120	ORIGIN OF MANUFACTURE	CHINA			
PART NUMBER	IT1002																												
BARCODE	5060523520121																												
DESCRIPTION	100A AC22A 2POLE MAIN SWITCH																												
VOLTAGE	230V/50Hz																												
MAXIMUM LOAD	100A AC22A																												
TERMINAL CAPACITY	50mm ²																												
STANDARD	BS EN 60947-3																												
IP RATING	20																												
MATERIAL	PA6 (Nylon 6)																												
WEIGHT (1PC) Kg	0.19																												
INNER CARTON QUANTITY	6																												
OUTER CARTON QUANTITY	120																												
ORIGIN OF MANUFACTURE	CHINA																												
		   																											
		CP (Electric) Ltd Unit 1, Block 8 Moorfield Industrial Estate Kilmarnock KA2 0BA t: 01563 533554 e: sales@cpelectric.co.uk www.cpelectric.co.uk																											
		Company Number 553729 VAT Number 258 7444 66																											