

JB5 screwless jumper bars

Common terminal block accessories



1SNK160143FF0014

JB5

5.2 mm 0.205 in spacing

5

Description

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Pre-cut poles for alternated jumpering between terminal blocks,
- Insulated,
- Positive locking.

Ordering details

Description	Color	Type	Order code	Pkg pce	Weight (1 pce) g
5.2 mm 0.205 in spacing	Orange	JB5-2	1SNK905302R0000	50	1.30
		JB5-3	1SNK905303R0000	50	2.00
		JB5-4	1SNK905304R0000	50	2.70
		JB5-5	1SNK905305R0000	50	3.50
		JB5-10	1SNK905310R0000	30	7.10
		JB5-50	1SNK905350R0000	10	36.10

Main technical data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
	NF F 16 101	I2F3		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	
		IEC	UL - CSA	Ex e
Rated current		32 A	30 A	
Rated voltage	Standard use	1000 V	600 V	630 V
	Cut extremities	800 V	300 V	400 V
	Cut poles	400 V	300 V	Consult us
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

All the main technical data provided are "manufacturer" values.

RoHS																			
RoHS																			


Accessories

Description	Color	Type	Order code	Pkg pce	Weight (1 pce) g
Circuit separators	Dark grey	CS	1SNK900101R0000	20	0.20


Mounting instructions



Additional accessories must be installed on the cut side of the jumper bar with cut extremities:

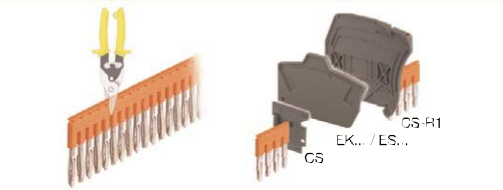

	Feed-through	Double-deck	Others
ZS	CS	ES...	CS-R1
ZK		EK...	

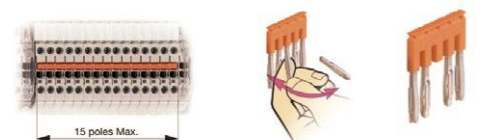

All the technical data for UL/CSA standard and dimensions in inches are in italic.