


Product Code: OV10110BKCW

Description: 10W LED Floodlight - IP65 - 4000K - Black

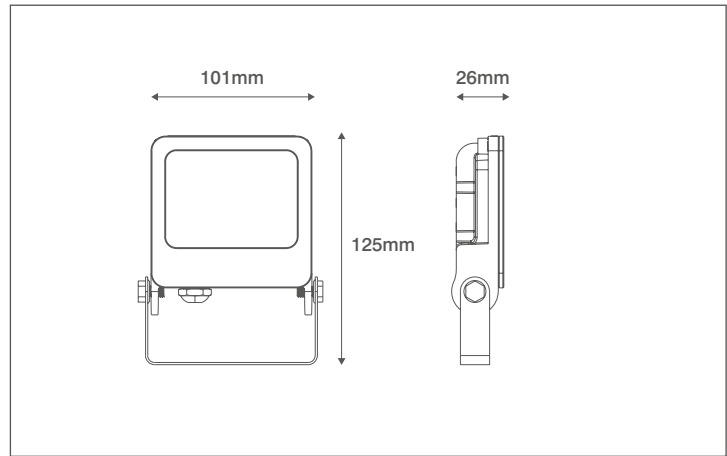


### General Information

Dimensions	101mm (W) x 125mm (H) x 26mm (D)
Materials	Body: Powdercoated Aluminium Diffuser: Prismatic Glass
Finish	Black (RAL 9004)
Product Weight	0.248Kg
Dimmable	No
Ingress Protection	IP65
IK Rating	IK06
Warranty	3 Years

### Supply & Power

Input Voltage & Frequency	240V~ 50/60Hz
Electrical Safety	Class I
Input Power	10W
Input Current	46mA
Inrush Current	0.036A (84µs)
Power Factor	0.9
Ambient Temperature (Ta)	-20°C - +45°C
Critical Temperature	-40°C - +70°C
Input Mains Cable	3 x 1mm <sup>2</sup> H05-RNF (1 Metre)

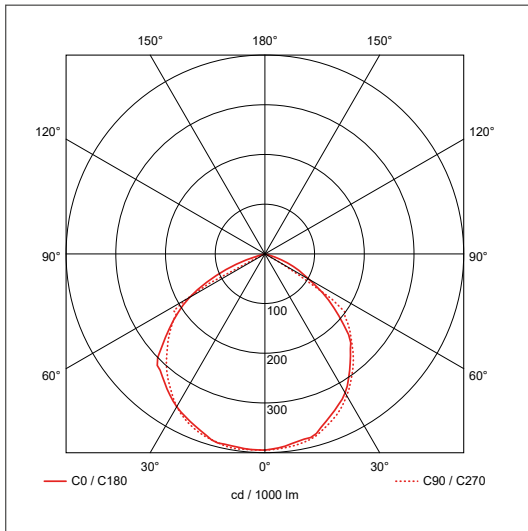


### Luminaire Output

Colour Temperature	4000K
CRI	>80
Typical Luminous Flux	800lm
Efficacy	80lm/W
Beam Angle	110°
LED Lifetime (L70)	30,000 Hours

Product Code: OV10120BKCW

Description: 20W LED Floodlight - IP65 - 4000K - Black

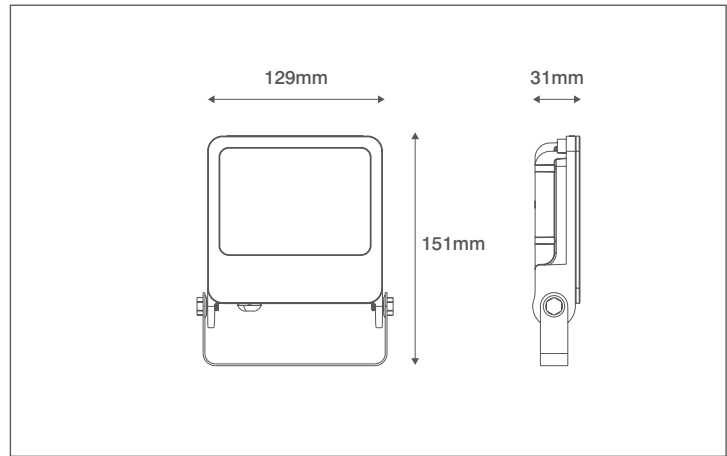

### General Information


Dimensions	129mm (W) x 151mm (H) x 31mm (D)
Materials	Body: Powdercoated Aluminium Diffuser: Prismatic Glass
Finish	Black (RAL 9004)
Product Weight	0.385Kg
Dimmable	No
Ingress Protection	IP65
IK Rating	IK06
Warranty	3 Years

### Supply & Power

Input Voltage & Frequency	240V~ 50/60Hz
Electrical Safety	Class I
Input Power	20W
Input Current	46mA
Inrush Current	0.047A (56µs)
Power Factor	0.9
Ambient Temperature (Ta)	-20°C - +45°C
Critical Temperature	-40°C - +70°C
Input Mains Cable	3 x 1mm <sup>2</sup> H05-RNF (1 Metre)


### Luminaire Output

Colour Temperature	4000K
CRI	>80
Typical Luminous Flux	1600lm
Efficacy	80lm/W
Beam Angle	110°
LED Lifetime (L70)	30,000 Hours

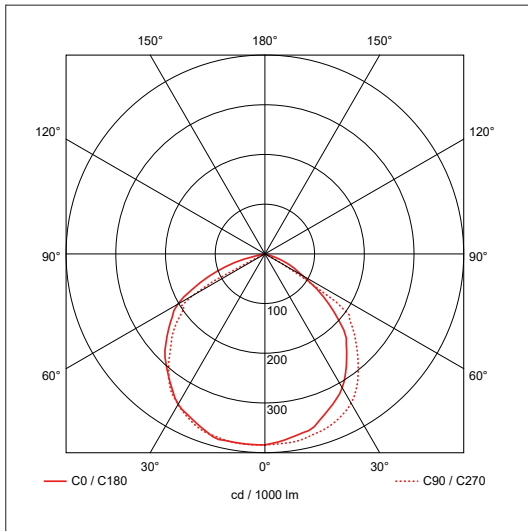

Product Code: OV10130BKCW

Description: 30W LED Floodlight - IP65 - 4000K - Black

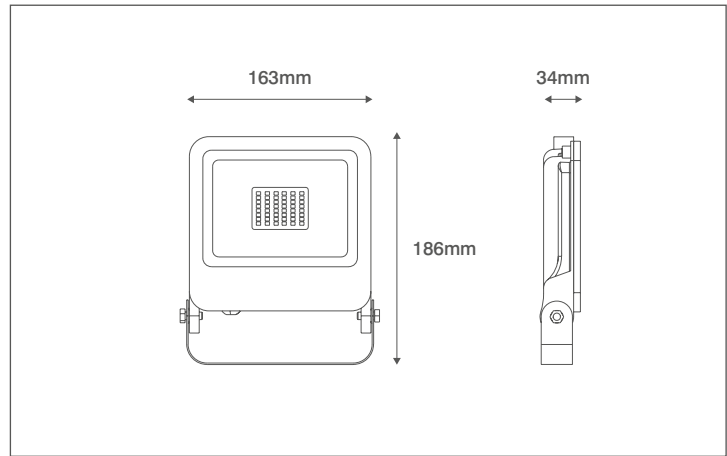

### General Information


Dimensions	163mm (W) x 186mm (H) x 34mm (D)
Materials	Body: Powdercoated Aluminium Diffuser: Prismatic Glass
Finish	Black (RAL 9004)
Product Weight	0.57Kg
Dimmable	No
Ingress Protection	IP65
IK Rating	IK06
Warranty	3 Years

### Supply & Power

Input Voltage & Frequency	240V~ 50/60Hz
Electrical Safety	Class I
Input Power	30W
Input Current	46mA
Inrush Current	0.326A (84µs)
Power Factor	0.9
Ambient Temperature (Ta)	-20°C - +45°C
Critical Temperature	-40°C - +70°C
Input Mains Cable	3 x 1mm <sup>2</sup> H05-RNF (1 Metre)


### Luminaire Output

Colour Temperature	4000K
CRI	>80
Typical Luminous Flux	2400lm
Efficacy	80lm/W
Beam Angle	110°
LED Lifetime (L70)	30,000 Hours

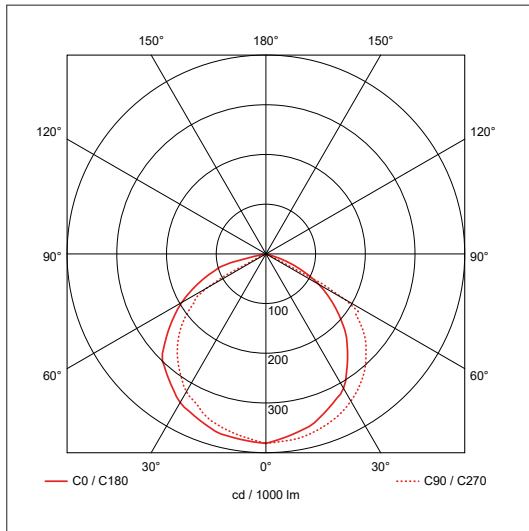

Product Code: OV10150BKCW

Description: 50W LED Floodlight - IP65 - 4000K - Black

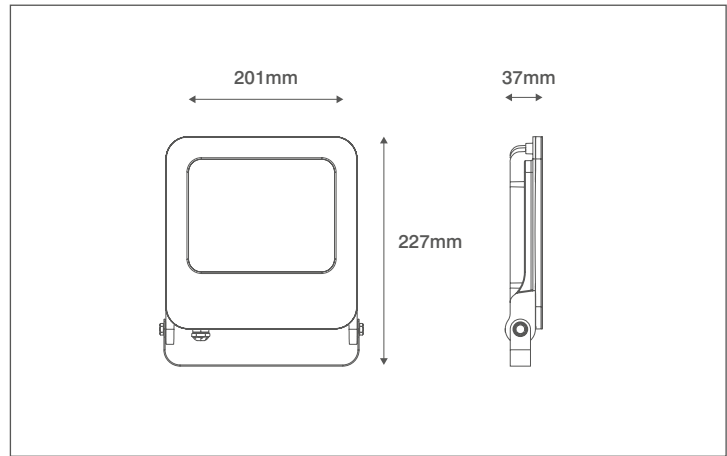

### General Information

Dimensions	201mm (W) x 227mm (H) x 37mm (D)
Materials	Body: Powdercoated Aluminium Diffuser: Prismatic Glass
Finish	Black (RAL 9004)
Product Weight	0.968Kg
Dimmable	No
Ingress Protection	IP65
IK Rating	IK06
Warranty	3 Years

### Supply & Power

Input Voltage & Frequency	240V~ 50/60Hz
Electrical Safety	Class I
Input Power	50W
Input Current	46mA
Inrush Current	0.352A (80µs)
Power Factor	0.9
Ambient Temperature (Ta)	-20°C - +45°C
Critical Temperature	-40°C - +70°C
Input Mains Cable	3 x 1mm <sup>2</sup> H05-RNF (1 Metre)

### Luminaire Output

Colour Temperature	4000K
CRI	>80
Typical Luminous Flux	4000lm
Efficacy	80lm/W
Beam Angle	110°
LED Lifetime (L70)	30,000 Hours

