


HARLED EMERGENCY BULKHEAD

Our maintained emergency bulkhead comes complete with self-adhesive vinyl legends. It has an IP65 body, a hinged screwless gear tray for ease of installation and is fully compliant to EN60598-2-22.



Light distribution

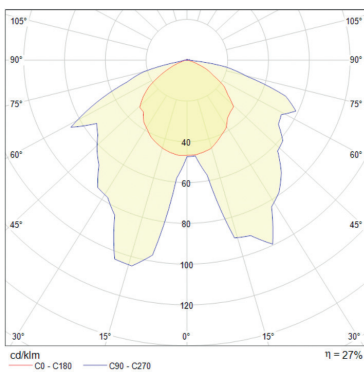

KEY FEATURES

- IP65 weatherproof rated
- Hinged gear tray, clear polycarbonate diffuser and base
- Simple to fix, central rear besa box entry, side & end knock-outs
- 150 lumens normal, 135 lumens in emergency
- Screw fixed diffuser
- 3 hour maintained
- 4 x 20mm knock-outs
- Designed to BSEN60598-2-22
- 16 pcs SMD 2835 LEDs

Harled Emergency Bulkhead Options



Use with legend




Use without legend

Order Code: HAR-EMLED-M

(All legends included)

Dimensions (mm)



DETAILS	
Warranty	2 years
Applications	Interior
Certification(s)	CE, EN60598-2-22
Colour Finish	White
Luminaire Fixing	Surface mounted
Construction Material	Polycarbonate body & gear tray
Weight (kg)	0.60
Diffuser Type	Polycarbonate
Voltage Range	AC220-240, 50-60Hz
Power Factor	> 0.90
Charge Current	70-150mA
Discharge Current	100-450mA
Protection Class IEC	Class I
Wattage	3W
Kelvin	5500K-6000K
Lumens	150 (normal) 135 (emergency)
Operating Temperature	-10°C to +50°C
Beam Angle	110°
Operating Hours	> 30000
IP Rating	IP65
Battery	3.6V 1500mAh NI-CD
Emergency Duration	3 Hrs