


HARLED POLO

A surface mounted LED luminaire with an IP65 rated polycarbonate body. It features a switchable colour temperature of 3000K, 4000K or 5000K. Polo offers optional integral microwave, emergency or combination, ideal for a number of different applications such as corridors and stairwells.



Harled Polo Bulkhead Options

Colour Temperature (Switchable)



Emergency & Sensor

STANDARD
Standard (Non Emergency or Microwave)


Integral Emergency


Integral Microwave Sensor


Integral Emergency & Microwave Sensor

KEY FEATURES

- IP65 protection against humidity and dust
- Switchable colour temperature 3000K | 4000K | 5000K
- 15W delivering 1200 lumens
- Suitable for ceiling or wall installation
- Fast and easy to install and wire
- Polycarbonate housing and metal gear tray
- Available with microwave, 3 hour emergency or combination

HARLED POLO


Technical Standard Specification

DETAILS


Warranty	3 years
Applications	Interior
Certification(s)	CE, UKCA
Colour Finish	White
Luminaire Fixing	Surface Mounted
Construction Material	Polycarbonate housing, metal gear tray
Diffuser Type	Polycarbonate TP(b) rated
Voltage Range	200V-240V AC 50/60hz
Power Factor	>0.90
Inrush Current	0.16A
Running Current	90-140mA
Protection Class IEC	Class II
Kelvin	3000K 4000K 5000K
Wattage	15W
Lumens	1200
Efficacy	~86Lm/W
Operating Temperature	-20°C to +45°C (0°C to 40°C for emergency)
Beam Angle	120°
Operating Hours	> 30000
CRI	> 82Ra
IP Rating	IP65
IK Rating	IK08
Macadam Ellipse	≤4 sdc
L70 B50	70,000 hours
L80 B50	50,000 hours
L90 B50	25,000 hours



Dimensions (mm)

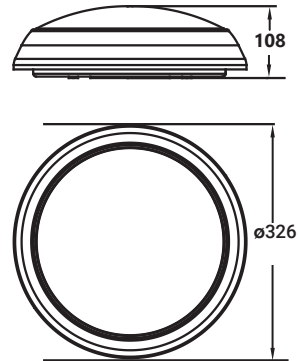


Light Distribution

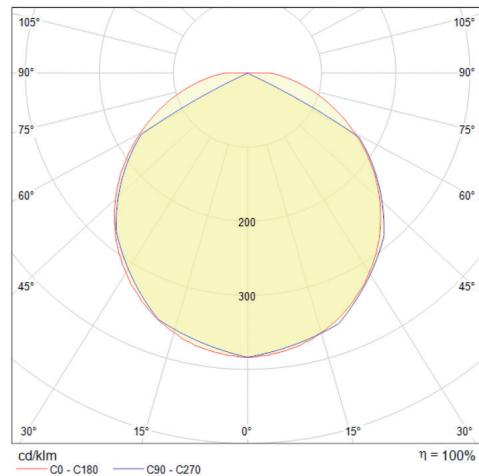

Order Codes

	Description	Unit Weight (kg)
HAR-POLO-CCT	Polo Standard	2.10
HAR-POLO-EM-CCT	Polo Emergency	2.21
HAR-POLO-MW-CCT	Polo Microwave sensor	2.08
HAR-POLO-EM-MW-CCT	Polo Emergency & Microwave sensor	2.30

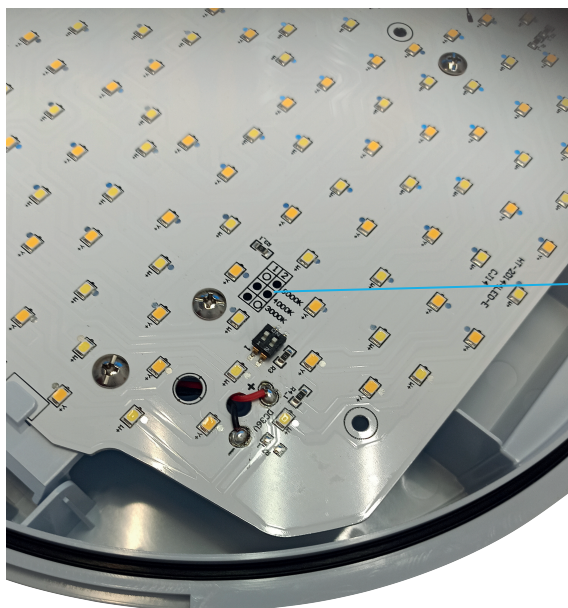

Switch colour temperature

